

# Vivitar®

## Automatic Fixed Mount Lens

Wide Angle  
28mm f2.5

Owner's Manual

## **Before you Begin . . .**

to use your new Vivitar Automatic Lens, please take time out to carefully study this Owner's Manual. Keep it handy as a guide and refer to it whenever questions arise on the use and care of your lens. The information it contains should help you get maximum enjoyment from your lens, enjoyment that comes from the satisfaction of taking pictures with that "professional touch."

## Getting Acquainted with your Lens



## Mounting your Lens

Your Vivitar lens has been designed to mount in the same manner as your normal lens. Holding the lens firmly around the lens barrel will enable you to achieve better balance during the mounting procedure.



## Holding your Lens

When using your lens, it is best to support the camera/lens combination with most of the weight resting in the palm of your left hand as shown. This leaves your other hand free to operate the controls of your camera and assures proper balance and stability.



## Focusing

Your new Vivitar lens has been designed to provide you with the utmost in fast and easy focusing. To focus, simply turn the Focusing Ring ② until the subject appears sharpest in the camera's viewfinder.



## DISTANCE SCALES

Your lens has two Distance Scales ④ which give you the distance from the subject in focus to the film plane. The white numbers denote this distance in feet while those in green represent distance in meters.



## DISTANCE INDEX MARK

The Distance Index Mark ④ is the reference point for the correct focus position of your lens. Reading the number of feet or meters indicated on the Distance Scales opposite this mark allows you to estimate the distance from the subject in focus to the film plane.



## INFRARED INDEX MARK

Your Vivitar lens provides an Infrared Index Mark ⑤ for use with infrared film. This mark appears at the right of the Distance Index Mark on the Depth of Field Scale ⑥ as a red "R". When using infrared film, focus normally on your subject and read the distance on the Distance Scales as indicated opposite the Distance Index Mark. Then, turn the Focusing Ring ② until the distance reading is opposite the Infrared Index Mark. Your lens will then be focused for average infrared photography. NOTE: Infrared radiation is by nature variable and therefore the Infrared Index Mark should be used only as an approximation.



## Aperture Control

The automatic diaphragm operation of your lens allows you to focus and compose your picture with the diaphragm at maximum aperture or "wide open." The diaphragm will automatically stop down to the preselected aperture at the moment of exposure and immediately re-open.

### EE COUPLED LENSES

Some cameras (such as the Konica Autoreflex series) automatically determine the correct aperture for a given photographic situation. For a lens to operate automatically with these cameras it must be coupled to the camera's EE mechanism.

Vivitar Automatic Lenses designed with EE coupling mechanisms differ from other lenses as follows:

**A. Aperture Scale** — Since cameras with EE mechanisms work automatically to f16 only, the aperture range of the EE coupled Vivitar lens goes to f16 only.




**B. EE Lock Button** — To ensure that the lens is not accidentally removed from EE operation, the Aperture Ring locks with a positive click when placed in the "EE" position. When you wish to set the aperture manually, depress the EE Lock Button to move the Aperture Ring from the "EE" position.




## Depth of Field

The Depth of Field is the area in acceptable sharpness in front of and behind the subject in focus. This depth is determined by the aperture you have selected and the distance from the subject in focus to the film plane. As you get closer to your subject or as you open your lens, e.g. from f22 to f2.8, the depth of field becomes shallower. By stopping your lens down, e.g. from f3.5 to f22, or getting farther away from your subject, this depth of field or zone of acceptable sharpness increases.

f5.6

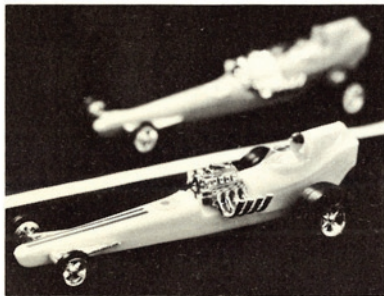

f16

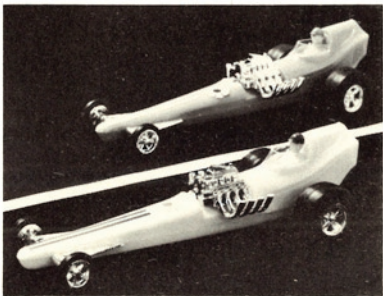

Another factor in determining depth of field is the focal length of your lens. Knowing the depth of field limitations of the lens you are using allows you greater creative control in your picture-taking.

Because of its short focal length, your Vivitar wide angle lens has a great zone of sharpness even when it is at wide open aperture. This deep zone of sharpness can be used effectively for “snap shooting” and is extremely helpful when shooting fast action and in situations where you are unable to take the time to focus properly. The photograph at right illustrates how a great depth of field can be used to add emotional impact to your pictures.







## DEPTH OF FIELD SCALE

Your lens has a double series of numbers representing f-stops engraved on the Depth of Field Scale <sup>Ⓢ</sup>. Once you have focused on your subject, all subjects within the distance range indicated between the marks for the aperture you have selected will be in the zone of acceptable sharpness.



**EXAMPLES:** At f2.5 and the subject at 5 feet, your depth of field is from 4'5¼" to 5'8⅞".


At f16 and the subject at 5 feet, your depth of field is from 2'9⅜" to 32'4⅞".

## DEPTH OF FIELD PREVIEW

You can see the depth of field in your camera's viewfinder by using the depth of field preview control which is located either on the camera body or on your lens. Vivitar Automatic Lenses designed for use on cameras not having depth of field preview controls on the camera body provide a Depth of Field preview control built into the Lens Mount <sup>Ⓢ</sup>.

Your lens may have any of the following three Depth of Field Preview controls:

- A.** Preview Button—Slide it to stop diaphragm down. When released, diaphragm returns to auto operation.
  
- B.** Auto/Manual Switch — Set to “M” position to stop diaphragm down. Return to “A” to re-activate auto diaphragm mechanism.
  
- C.** Auto/Manual Ring — Turn ring until “M” is opposite red dot. To re-activate auto diaphragm operation, turn ring until dot is opposite “A.”



## Depth of Field Table

If you need more precise depth of field information than can be obtained by looking through your camera's viewfinder, the following table will be helpful.


### 28mm f2.5

ft.	f2.5	f4	f5.6	f8	f11	f16
1.5	1'5 <sup>3</sup> / <sub>8</sub> " - 1'6 <sup>5</sup> / <sub>8</sub> "	1'5 <sup>1</sup> / <sub>4</sub> " - 1'7"	1'4 <sup>3</sup> / <sub>4</sub> " - 1'7 <sup>3</sup> / <sub>8</sub> "	1'4 <sup>3</sup> / <sub>8</sub> " - 1'8 <sup>1</sup> / <sub>8</sub> "	1'3 <sup>3</sup> / <sub>4</sub> " - 1'9"	1'3 <sup>3</sup> / <sub>8</sub> " - 1'10 <sup>3</sup> / <sub>4</sub> "
2	1'11" - 2'1 <sup>1</sup> / <sub>4</sub> "	1'10 <sup>3</sup> / <sub>8</sub> " - 2'1 <sup>7</sup> / <sub>8</sub> "	1'9 <sup>3</sup> / <sub>4</sub> " - 2'2 <sup>3</sup> / <sub>4</sub> "	1'9" - 2'4 <sup>1</sup> / <sub>4</sub> "	1'8 <sup>1</sup> / <sub>8</sub> " - 2'6 <sup>1</sup> / <sub>4</sub> "	1'6 <sup>3</sup> / <sub>4</sub> " - 2'10 <sup>1</sup> / <sub>4</sub> "
3	2'9 <sup>5</sup> / <sub>8</sub> " - 3'2 <sup>3</sup> / <sub>4</sub> "	2'8 <sup>1</sup> / <sub>4</sub> " - 3'4 <sup>3</sup> / <sub>4</sub> "	2'7" - 3'7 <sup>1</sup> / <sub>8</sub> "	2'5 <sup>1</sup> / <sub>4</sub> " - 3'11 <sup>1</sup> / <sub>4</sub> "	2'3 <sup>3</sup> / <sub>8</sub> " - 4'5 <sup>5</sup> / <sub>8</sub> "	1'6 <sup>3</sup> / <sub>4</sub> " - 5'9 <sup>1</sup> / <sub>2</sub> "
5	4'5 <sup>1</sup> / <sub>4</sub> " - 5'8 <sup>7</sup> / <sub>8</sub> "	4'1 <sup>3</sup> / <sub>4</sub> " - 6'3 <sup>5</sup> / <sub>8</sub> "	3'10 <sup>3</sup> / <sub>4</sub> " - 7'1 <sup>1</sup> / <sub>2</sub> "	3'6 <sup>3</sup> / <sub>4</sub> " - 8'6 <sup>3</sup> / <sub>4</sub> "	3'2 <sup>3</sup> / <sub>4</sub> " - 11'9 <sup>3</sup> / <sub>8</sub> "	2'9 <sup>3</sup> / <sub>8</sub> " - 32'4 <sup>7</sup> / <sub>8</sub> "
10	7'10 <sup>3</sup> / <sub>4</sub> " - 13'7 <sup>1</sup> / <sub>8</sub> "	7'1 <sup>1</sup> / <sub>4</sub> " - 17'5 <sup>1</sup> / <sub>8</sub> "	6'3 <sup>3</sup> / <sub>8</sub> " - 24'11 <sup>1</sup> / <sub>2</sub> "	5'5 <sup>1</sup> / <sub>4</sub> " - ∞	4'7 <sup>7</sup> / <sub>8</sub> " - ∞	3'9 <sup>1</sup> / <sub>4</sub> " - ∞
30	16'5 <sup>7</sup> / <sub>8</sub> " - ∞	13'1 <sup>1</sup> / <sub>4</sub> " - ∞	10'7 <sup>3</sup> / <sub>4</sub> " - ∞	8'4 <sup>5</sup> / <sub>8</sub> " - ∞	6'7 <sup>5</sup> / <sub>8</sub> " - ∞	4'11 <sup>1</sup> / <sub>4</sub> " - ∞

## Taking Care of Your Lens

- A.** When attaching threaded accessories (filters, etc.) to your lens, align the accessory very carefully with the Filter Thread ⓘ to prevent any possibility of damage.
- B.** Keep your lens dust-free by making sure both front and rear lens caps are in place when it is not in use.
- C.** Clean your lens with an air brush, anti-static brush, or wipe it lightly with a camel hair brush or lens tissue. In EXTREME cases use a clean, soft cotton cloth moistened with denatured alcohol.  
*Never rub the Lens surface with your finger, clothing or any other abrasive material.* Cleaning your lens in this way will scratch the lens coating and can cause damage to the element surface.
- D.** Always store your lens in a cool, dry place. It's a good idea to store it with the silica gel packet supplied with your lens especially during humid or wet weather. Remember, a leather case with a silica gel packet is as good as an aluminum case with polyfoam inserts to protect your lens and provides a handy means of storage.

## Specifications

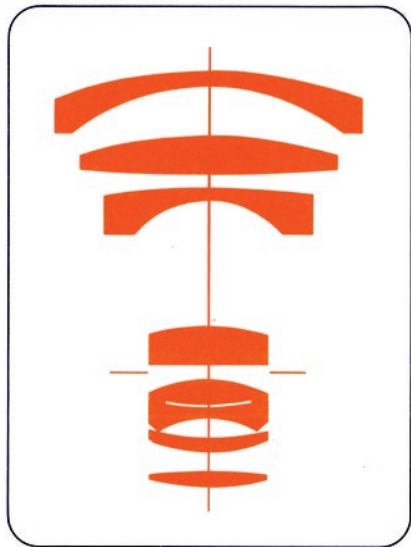

**Elements/Groups:** 8/7

**Angle of Acceptance:** 74°

**Aperture Range:** f2.5—f22\*

**Minimum Focusing Distance  
from Film Plane:** 12 in.  
(304.8 mm)

**Weight:** 11¼ oz. (318.94 gr.)

**Length at ∞:** 2¾" (60.33 mm)

**Max. Barrel Diameter:** 2½"  
(63.5 mm)

**Accessory Size:** 62mm

**Retractable Lens Hood:** NO

**Accessories Included:** Front and  
rear lens caps and silica gel  
packet.

\*EE coupled lenses to f16 only.

*Specifications subject to change  
without notice. Weights and lengths  
may vary slightly, depending on lens  
mount.*

ENTER LENS SERIAL NUMBER  
HERE FOR YOUR RECORD

224 11768

# Vivitar®

## Vivitar Corporation

a subsidiary of: **Ponder & Best, Inc.**  
USA/Japan/W. Germany

Corporate offices: Ponder & Best, Inc.  
Los Angeles, Ca. 90064 USA



# OWNER'S PURCHASE RECORD

## Vivitar Lens

**NOTE:** Please retain this portion. If warranty service is needed this card and sales slip should be presented to expedite handling.

Model

Serial Number

21-0012

28  
2.5

22411768

Purchase Date

5-20-74

, 19

Dealer

Porter's Camera Store, Inc.

Address

Box 628

City

Cedar Falls

State

Iowa

Owner

Jay Alan Richardson

Address

109 S. Washington St.

City

Lindsborg

State

Kansas

Zip

67456

**OWNER'S  
PURCHASE RECORD**

**Vivitar**  
**LENS**

# *Certificate of Warranty and Service*

## **Vivitar Lens — for 35mm Cameras**

Your purchase of this new **Vivitar Lens** is an expression of your confidence in the quality products manufactured by Vivitar Corporation. Our pledge of support to you is expressed in the certificate of warranty and the service information listed below.

### **PARTS AND LABOR WARRANTY**

For **Five Years** from the date of original purchase, Vivitar Corporation, a subsidiary of Ponder & Best, Inc., warrants that any part which fails to function properly under normal use will be repaired or replaced at Ponder & Best, Inc. option without charge for parts and labor, if delivered transportation prepaid to an **authorized Ponder & Best, Inc. Service Center**, accompanied with an **Owner's Purchase Record Card** and evidence of date and place of purchase.

The sole and exclusive remedy under all guarantees or warranties, expressed or implied, is strictly limited to repair or replace-

ment as herein provided and neither Vivitar Corporation, nor Ponder & Best, Inc. shall be liable for consequential damages, damages from delay or loss of use of equipment or for damaged film.

### **SERVICE**

Should your product require service, please package it carefully using ample padding material to prevent damage in transit, and send it **prepaid and insured** to one of the Ponder & Best, Inc. Service Centers listed in the International Service Center Listings Folder. In your package, please include the following:

1. A dated Owner's Purchase Record Card and evidence of date and place of purchase.
2. A detailed description of the problem.
3. Sample films, if they relate to the problem.

**AUTHORIZED SERVICE CENTERS FOR VIVITAR PHOTOGRAPHIC PRODUCTS  
ARE LISTED IN THE "INTERNATIONAL SERVICE CENTER LISTINGS" FOLDER.**

**NOTE:** Vivitar photographic products serviced out of the country in which they were purchased will be subject to nominal handling charges.

# **INTERNATIONAL SERVICE CENTERS**

**SUBJECT TO CHANGE  
WITHOUT NOTICE**

## **FOR Vivitar PHOTO PRODUCTS**

---

### **NORTH AMERICA**

#### **UNITED STATES**

**Ponder & Best, Inc.  
58-20 Broadway  
Woodside, New York 11377  
Telephone: 672-9500**

#### **UNITED STATES**

**Ponder & Best, Inc.  
7040 Lawndale Avenue  
Lincolnwood, Illinois 60645  
Telephone: 675-6900**

#### **UNITED STATES**

**Ponder & Best, Inc.  
1630 Stewart Street  
Santa Monica, California 90406  
Telephone: (213) 829-3672**

#### **CANADA**

**Precision Cameras of Canada (1964) Ltd.  
5000 Buchan Suite 201  
Montreal, Quebec, Canada  
Telephone: 731-3806**

Effective 9/1/70